
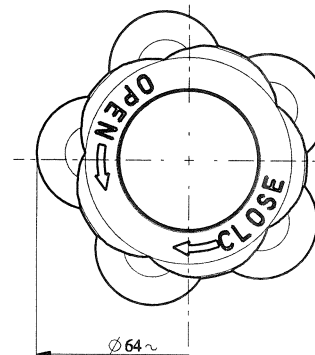


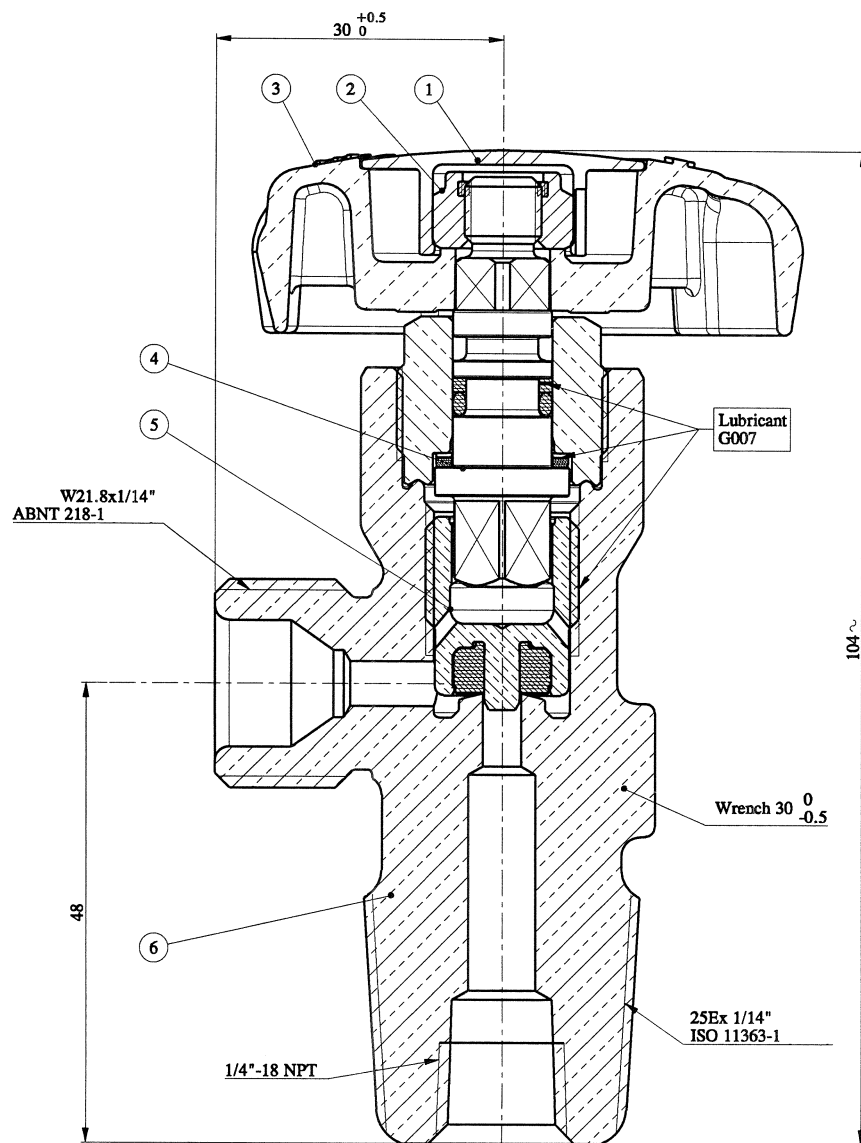

Markings:

- CAVAGNA GROUP symbol 
- EU
- ISO V
- 25E
- W21.8 ABNT 218-1
- O₂
- Year and Month of production (Ex.: 2012/01)
- (Production order)

 ☐ ☐ ☐ ☐
(see 2001101736)

Technical information:
 Temperature range: -20° +65°C
 Only if marked on valve: -40° +65°C
 Gland nut closure torque: 75-90 Nm.
 Orifice: Ø 4mm.
 HOMOLOGATION: L.37.072
 W.P.: 230 bar

Materials:
 Seat Pad: PA 66
 O-Ring: EPDM
 Antifriction ring: PA 6
 Anti extrusion ring: PA 6

6	M2009 Body 25E-W21.8 ABNT 218-1	1	Cu Zn40 Pb2 (CW617N) EN 12165	0171507094
5	Assembled piston	1	/	0379500031
4	Assembled spindle	1	/	1379500144
3	Handwheel	1	EN AC-AISI11Cu2(Fe) UNI EN 1706	0271103032
2	Handwheel Nut	1	Zinc-coated Steel -6-th Class	1071100047
1	Protection cap blue RAL5002	1	PA 6	1671101012
POS	DENOMINATION	Q.	MATERIAL	DRAW NR.

DESCRIPTION		V.M2009 for O2 25E-W21.8 ABTN				
	GEN. TOLL. ±/	GEN. FILL. R /	ANG. TOLL. ±/	DRAFT /	SCALE 2:1	SHEET 1 / 1
	RESPONS.	DRAWN	ISSUE	MATERIAL		
	DATE	23-05-12	23-05-12	/		
	SIGNATURE	Scalvini	Cazzago	/		
	ACTIVITY	NUMBER	PROJECT	DRAW NUMBER		
		19208	08937			
	SIGN.	Treccani	REFERENCE	VOA1SOS049		
	INDEX	A1	0.493 Kg	XXXXXX		

VOA5SOS027